

Lammhults Möbel AB
Box 26
360 30 LAMMHULT
SWEDEN

Testing of tables according to prEN 15372:2015 (3 appendices)

| | |
|--------------------------------|---|
| Customer: | Lammhults Möbel AB |
| Test object/ID: | Table/Attach 480x150x74 cm |
| Test method: | prEN 15372:2015 Furniture - Strength, durability and safety - Requirements for non-domestic tables. Test severity 2 |
| Scope: | Complete test |
| Date of test: | 2016-08-01 – 2016-08-09 |
| Test result: | The tested object passed the test |
| Reservation: | The test results in this report apply only to the particular Equipment Under Test (EUT) |
| Test environment: | 23 ± 2°C and 50 ± 5% relative humidity |
| Additional information: | The test result also complies with EN 15372:2008 |

SP Technical Research Institute of Sweden Sustainable Built Environment - Wood Technological Assessment

Performed by

Examined by

Michael Lindblad

Bengt-Åke Andersson

Appendices

1. Test result (2 pages)
2. Description of test object (1 page)
3. Pictures (2 pages)

SP Technical Research Institute of Sweden

Postal address
SP
Box 857
SE-501 15 BORÅS
Sweden

Office location
Brinellgatan 4
SE-504 62 BORÅS

Phone / Fax / E-mail
+46 10 516 50 00
+46 33 13 55 02
info@sp.se

Laboratories are accredited by the Swedish Board for Accreditation and Conformity Assessment (SWEDAC) under the terms of Swedish legislation. This report may not be reproduced other than in full, except with the prior written approval of the issuing laboratory.

Appendix 1

Test result

Abbreviations: N/A = Not applicable
N/T = Not tested

Table 1

| 1. | General requirements | prEN 15372:2015 | Results |
|-----|--|-----------------|---------|
| 1.1 | <p>The table shall be designed so as to minimise the risk of injury to the user.</p> <p>All parts of the table with which the user comes into contact during intended use, shall be designed so that physical injury and damage are avoided.</p> <p>This requirement is met when:</p> <ul style="list-style-type: none"> a. edges of table tops which are directly in contact with the user are rounded or chamfered, b. all other edges accessible during intended use are free from burrs and/or sharp edges, c. ends of hollow components with a diameter greater than 7 mm and less than 12 mm where the accessible depth is greater than 10 mm, are closed or capped. <p>Movable and adjustable parts shall be designed so that injuries and inadvertent operation are avoided.</p> <p>It shall not be possible for any load bearing part of the table to come loose unintentionally.</p> <p>All parts which are lubricated to assist sliding shall be designed to protect users from lubricant stains when in normal use.</p> | 5.1 | Pass |

Table 2

| 2. | Shear and squeeze points | prEN 15372:2015 | Results |
|-----|--|-----------------|---------|
| 2.1 | <p>There shall be no shear and squeeze points created by parts of the table operated by powered mechanisms, i.e. springs, gas lifts and motorised systems.</p> <p>There shall be no shear and squeeze points created by forces applied during normal use.</p> <p><u>Note!</u> Shear and squeeze points that are created only during manually setting up and folding are acceptable, because the user can be assumed to be in control of his/her movements and to be able to cease applying the force immediately upon experiencing pain.</p> | 5.2 | Pass |

Appendix 1

Table 3

| 3 | Strength, durability | EN 1730:2012 | Cycles | Load | Results |
|----------|---|---------------------|---------------|------------------|----------------|
| 3.1 | Horizontal static load test - Type 1 ¹ - Type 2 | 6.2 | 10 10 | 400 N 200 N | Pass N/A |
| 3.2 | Vertical static load test on main surface | 6.3.1 | 10 | 1250 N | Pass |
| 3.3 | Additional vertical static load test where the main surface has a length > 1 600 mm | 6.3.2 | 10 | 1000 N | Pass |
| 3.4 | Vertical static load test on ancillary surface ² | 6.3.3 | 10 | 300 N | N/A |
| 3.5 | Horizontal durability test | 6.4.1 6.4.2 | 15 000 | 300 N | Pass |
| 3.6 | Vertical durability test (For cantilever or pedestal tables) | 6.5 | 15 000 | 300 N | Pass |
| 3.7 | Vertical impact test (for tables with glass in their construction) - Safety glass ³ - Other glass | 6.6.1 6.6.2 | 10 10 | 180 mm 240 mm | N/A N/A |
| 3.8 | Vertical impact test for all other table tops | 6.6.1 6.6.3 | 10 | 180 mm | Pass |
| 3.9 | Drop test (for tables weighting more than 20 kg) - For tables without glass - For tables with glass | 6.9 | 5 5 | 100 mm 50 mm | Pass N/A |
| 3.10 | Stability under vertical load test ⁴ - Main surface (max 400 N) - Ancillary surface (max 200 N) | 7.2 | 1 1 | 400 N x N | Pass N/A |
| 3.11 | Stability for tables with extension elements | 7.3 | 1 | 200 N | N/A |

¹ Type 1 tables have a main surface 600 mm or more above the floor surface and a surface area greater than 0.25 m². All other tables are considered as Type 2.

² A table extension added in the centre of the table shall be considered as the main surface. A part of the main surface in the unextended configuration may become an ancillary surface in the extended configuration.

³ Glass is considered to be safety glass if the glass fulfils the requirements in EN 12150-1:2012, Clause 8, fragmentation test; or where the mode of breakage (β) according to EN 12600, is Type B or Type C.

⁴ Loads for stability tests are calculated according to table 2 in EN 1730:2012.

Appendix 2

Description of test Object

Test object/ID: Table/Attach 480x150x74 cm

Dimensions

Width: 4800 mm

Depth: 1500 mm

Height: 740 mm

Mass: 185.8 kg

Components

Legs: Die cast aluminium legs mounted on aluminium profiles

Table top: 22 mm wooden based

Functions: -

Sampling: The test object was selected by the customer

Date of arrival at
SP test laboratory: 2016-06-29

Observed defects before testing: No defects

Appendix 3

Pictures

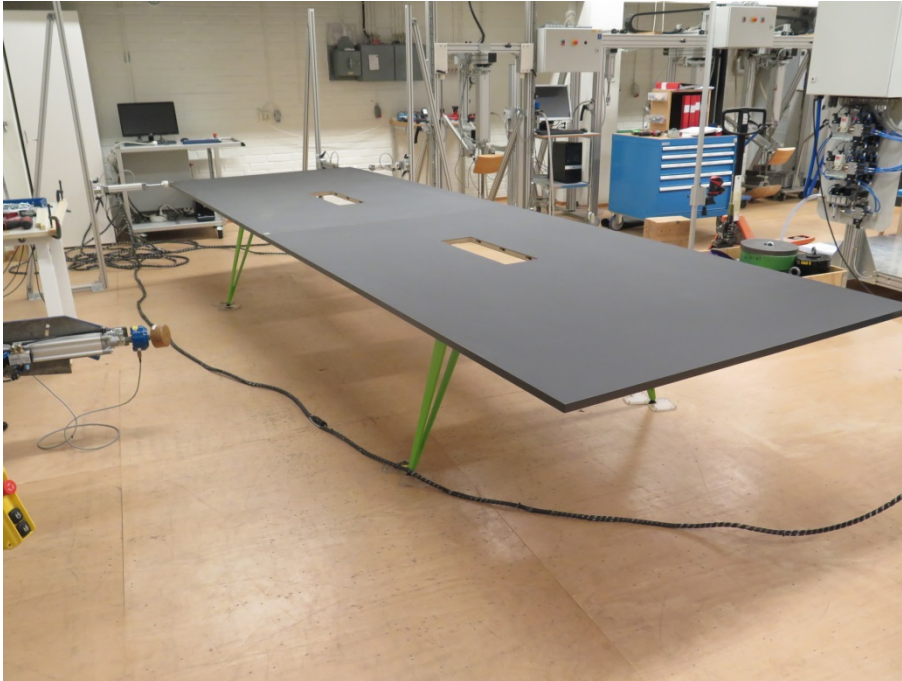


Figure 1



Figure 2

Appendix 3

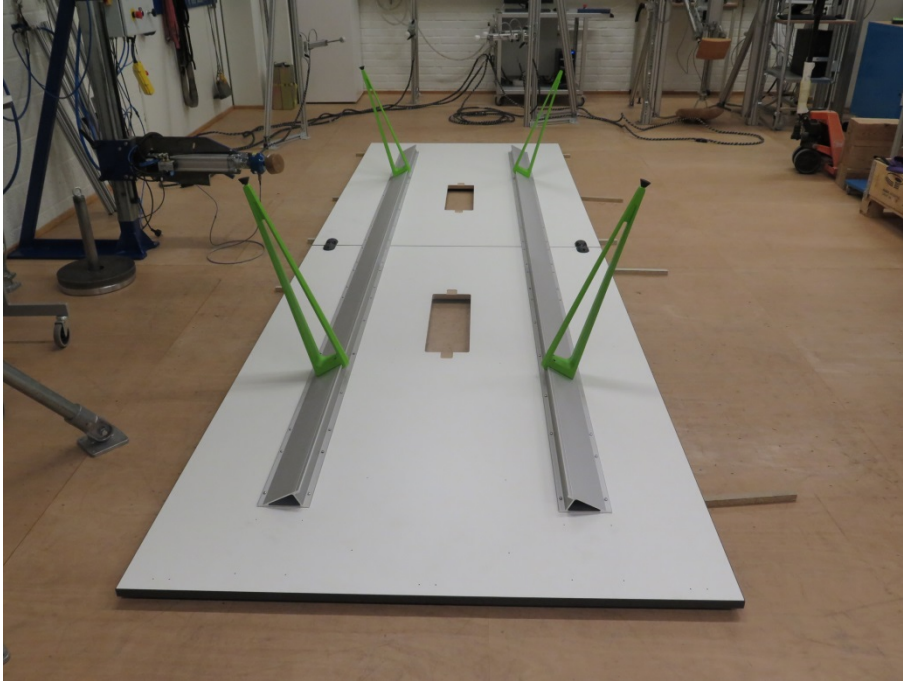


Figure 3



Figure 4